

# HC SERIES





## HIGH EFFICIENCY CONDENSING BOILER

**Excellent value for the money, the HC Series offers an economical solution to all your home heating needs without sacrificing reliability. DHW demand priority standard. Pair with one of our IBC Indirect Water Heaters for a complete home heating system.**

- Unique and innovative single pass Copper / Aluminum heat exchanger, ensuring greater efficiency and eliminating water side corrosion.
- Up to 96% AFUE, with full ASME-rated vessel.
- Built-in boiler pump.
- PVC/CPVC/PPs approved.
- 2" & 3" venting options available.
- Contractor friendly, easy to install, maintain and service.
- Fewer parts ensuring greater reliability.
- Outdoor reset technology increases efficiency by lowering the water temp automatically.
- Reset heating - Set point - DHW.
- Includes Air Vent, Outdoor Sensor & Relief Valve.
- Better reliability and durability.

**THE SMART CHOICE  
FOR HEATING**

# IBC®

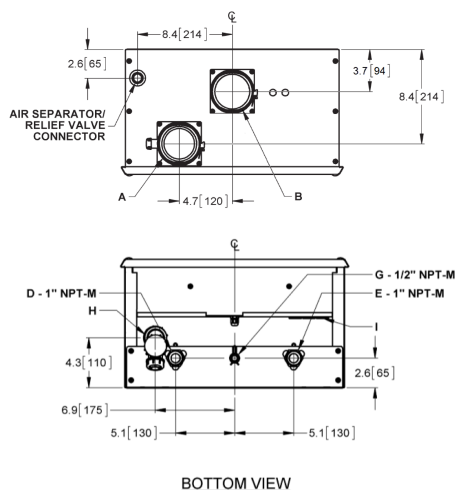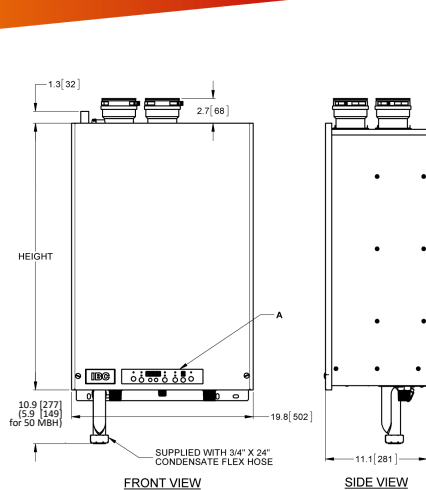

HEIGHT	HC SERIES
HC 13-50	26.6" / 676mm
HC 15-96	31.3" / 796mm
HC 20-125	31.3" / 796mm
HC 33-160	31.3" / 796mm

DESCRIPTION	HC SERIES
A Exhaust outlet	3" Schedule 40
B Combustion air	3" Schedule 40
E Heating water inlet (return)	1" Male NPT
F Heating water outlet (supply)	1" Male NPT
G Gas inlet	1/2" Male NPT
H Condensate outlet	3/4" Hose
I Knock-outs (3)	1/2"

#### Connections

SURFACE	DISTANCE FROM COMBUSTIBLE SURFACES	RECOMMENDED DISTANCE FOR INSTALLATION AND SERVICE
Front	2"	24"
Rear	0"	0"
Left side	1.5"	6" (labels may be difficult to read with reduced clearance)
Right side	4"	6" (labels may be difficult to read with reduced clearance)
Top	2"	24"
Bottom	8"	24"

#### Clearance from boiler cabinet

EXHAUST PIPE SIZE	MAXIMUM EQUIVALENT LENGTH
<b>Sched.40; Rigid PPs</b>	(each side)
2"	35'
3"	120'
2"/3" 90° Long sweep vent elbow	Allow 5' equivalent feet
2"/3" 90° Short sweep vent elbow	Allow 8' equivalent feet
2"/3" 45° Vent elbow	Allow 3' equivalent feet
<b>PPS</b>	
PPs 87-90° Elbow	Allow 8' equivalent feet
<b>Flexible PPs</b>	
3" Flexible	35 Actual feet times 1.4

#### Maximum exhaust venting length


SPECIFICATIONS	HC 13-50	HC 15-96	HC 20-125	HC 33-160
CSA Input (Natural Gas or Propane *) – MBH	13.5 – 51	15 – 96	20 – 125	33 – 160
CSA Input (Natural Gas or Propane *) – KW	3.95 – 14.94	4.4 – 28.1	5.6 – 36.6	9.7 – 46.9
CSA Output – MBH	12.4 – 45.4	14.5 – 85.9	18.6 – 110.8	30.4 – 140.0
CSA Output – KW	3.64 – 13.3	4.3 – 25.2	5.4 – 32.5	8.9 – 41.0
A.F.U.E	95%	96%	95%	94%
Min gas pressure (Nat. Gas or Propane) – inch w.c.	5	5	5	5
Max gas pressure (Nat. Gas or Propane) – inch w.c.	14	14	14	14
Power (120Vac/60Hz) – Watts @ full fire with internal pump	126	128	130	164
Weight (empty) – lbs/Kg	84 / 38	96 / 44	96 / 44	96 / 44
Pressure vessel water content – USG/Liters	0.37/1.4	0.5/1.9	0.5/1.9	0.5/1.9
Max boiler flow rate – USgpm	9	10	11	11
Min boiler flow rate – USgpm	2	2	3	3
Max operating pressure – Space Heating Coil – psig	43.5	43.5	43.5	43.5
Approved installation altitude – ASL	0 – 10,000 ft	0 – 10,000 ft	0 – 10,000 ft	0 – 10,000 ft
Ambient temperature – Low (°F/°C)	32/0	32/0	32/0	32/0
Ambient temperature – High (°F/°C)	122/50	122/50	122/50	122/50
Max relative humidity (non-condensing)	90%	90%	90%	90%
Min water temperature – Space Heating (°F/°C)	50/10	50/10	50/10	50/10
Max water temperature – Space Heating (°F/°C)	194/90	194/90	194/90	194/90
Max equivalent vent length 2" (each side)	35'	35'	35'	35'
Max equivalent vent length 3" (each side)	120'	120'	120'	120'

Natural Gas boilers require a Propane conversion kit, to be ordered separately if converting from Natural Gas to Propane. Boilers require a Natural Gas conversion kit to be ordered separately if converting from Propane to Natural Gas.

Propane

Boilers are shipped with 30 psi pressure relief valve.

#### Accessories



**EZ Pipe Manifold**  
Part# 190-149



**Floor Stand**  
Part# P-267



**Service Parts Kit**  
Part# P-743C



**Sidewall Vent Terminal Kit**  
Part# P-741 (2"), P-742 (3")



sales@ibcboiler.com ▪ www.ibcboiler.com

**Toll Free: 1-844-HEAT IBC / 1-844-432-8422**

All information contained in this brochure is subject to change without notice. Due to clerical error, regulation change or product development please confirm all information with IBC INTERGAS

900-101 (R9) Aug 2020

